

PhaseCam[®] NIR

4D

Dynamic Twyman-Green Interferometer

Instantaneous Acquisition

The PhaseCam[®] NIR is a compact, dynamic laser interferometer operating at 1064 nm. It incorporates a 4MP camera, with fully motorized controls of all internal functions. With on-axis illumination and imaging, making it ideal for optical path measurement of long-radius meter-scale concave mirrors, mirror segments, telescope assemblies, and collimators. It is also optimized for the alignment of complex optical assemblies and characterization of deformable mirrors.

The PhaseCam NIR incorporates Dynamic Interferometry[®] technology, using a single camera, high-speed optical phase sensor to make wavefront measurements in less than 30 microseconds—over 5000 times faster than a temporal phase shifting interferometer. Because acquisition time is so short, the PhaseCam can be used under almost any conditions, without vibration isolation. Vibration immunity makes the PhaseCam ideally suited for use on the production floor, in clean rooms and in environmental test chambers.

Compact and lightweight, the PhaseCam NIR was designed with performance and remote measurement in mind. Moving the system to reconfigure a test set is simple and easy, and isolation equipment is not required. Fully motorized controls make it easy to operate the system in remote locations.



PhaseCam 6110 NIR, with a diverger optic, on the 5-axis pedestal.

Complete Measurement System

The PhaseCam NIR system includes the interferometer, 4Sight[™] Focus advanced wavefront analysis software, and complete computer system. Samples with reflectivity from 1% to 100% can be measured with optimal signal-to-noise ratio via a simple adjustment. The diffraction-limited optical system maximizes sampling resolution of the test part or configuration. Easy to use, the vibration insensitive PhaseCam NIR ensures rapid and precise data acquisition.

Industry Leading Analysis

4Sight Focus wavefront acquisition and analysis software utilizes a user-friendly interface with unmatched simplicity, analysis features and graphical displays.

4Sight's 64-bit acquisition engine produces rapid analysis and display of single, averaged or burst measurements. Continuous data acquisition and real-time Zernike bar plots provide real-time visual feedback for simplifying optical system or beam train alignment.

The user-friendly interface makes data comparison, manipulation, masking, reference subtraction, filtering and terms removal simple to perform. Zernike, Seidel, geometric and diffraction analyses are standard. Comprehensive data sharing capabilities let you read, write, and save most file types, including Zemax, MatLab, Vision, MetroPro, HDF5 and CodeV.

FEATURES

- On-axis, vibration-insensitive dynamic interferometer
- Superior instrument transfer function
- Fast data acquisition
- Continuously adjustable sample reflectivity compensation


APPLICATIONS

- Meter-class telescope optics
- Large imaging system alignment
- Tests in vacuum/environmental chambers
- Production floor quality control


PhaseCam[®] NIR

Specifications

Configuration	Model 6110 NIR 1064 nm
Description	Vibration insensitive dynamic Twyman-Green interferometer
Acquisition Mode	Single camera, high-speed optical phase sensor
Optical Path	Fiber-coupled head and 1064 nm laser source module; 5 m fiber
Typical Laser Power	450 mW
Maximum Cavity Length	>60 m
Beam Diameter	7 mm FWHM
Divergers	Range of lenses from f/1 to f/32
Polarization	Circular
Focus Range	±12.5 mm, optical magnification dependent
Pupil Magnification	1X fixed
Fringe Contrast	User-adjustable for reflectivity from 1–100%
Camera	4 MPx, 12-bit standard
Data Array	User selectable full, half, quarter data arrays
Motorized Controls	Focus, reference beam block, aperture block, contrast adjustment
Operating System	Windows [®] 10
System Software	4Sight™ Focus Analysis Software Instantaneous Phase Shifting data acquisition Reference generation, subtraction, data averaging, masking 2D and 3D surface maps Zernike / Seidel / Slope / Geometric / Fourier Analysis Fiducial-aided data set mapping HDF5 data format standard, others supported Analysis of multiple sub-apertures Upgrades free during warranty period
Physical Envelope	Measurement Head: < 38.9 × 15.7 × 9.1 cm (15.3 × 6.2 × 3.6 in) Laser Source: 58.9 × 24.1 × 14.0 cm (23.2 × 9.5 × 5.5 in)
Weight	Measurement Head: < 4.3 kg (9.5 lbs) Laser Source: 12.25 kg (27 lbs)
Power consumption	< 750 Watts with computer
Temperature Range	Operational: 16–27° C (60–80° F), non-condensing Storage: -1–38° C (30–100° F), non-condensing
System Performance	
Acquisition Rate	≥ 15 frames/sec live video ≥ 15 frames/sec acquisition with post processing
Minimum Exposure	30 μsec
Sample Reflectivity	1–100%
RMS Repeatability	< 0.001 wave*
RMS Precision	< 0.002 wave**
Warranty	One Year, limited, on-site system installation and operator training

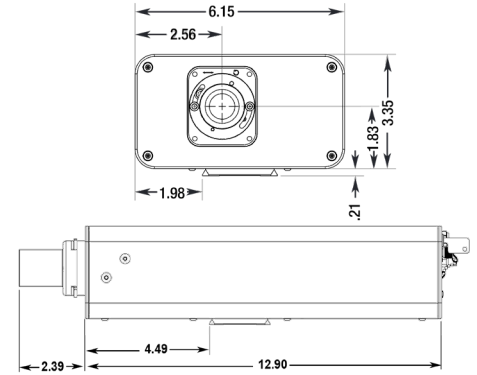

Mainframe

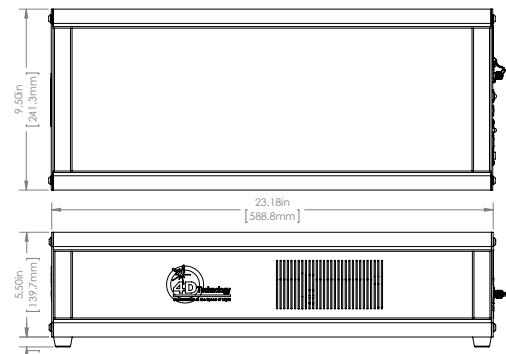

Source module

* One sigma for RMS of 10 data sets of calibration mirror, each data set being an average of 16 measurements.

**Average RMS of the pixel by pixel difference of 10 data sets between measured surface and the calibrated surface. Each data set is an average of 16 measurements. Calibrated surface is the average of all 160 measurements.

Patent 7,230,717. Other patents may apply.

PhaseCam and Dynamic Interferometry are registered trademarks of 4D Technology Corporation.

MetroPro IDL, MatLab, Opticode, Vision, HDF5, CodeV and Windows are registered trademarks of their respective owners.

All specifications subject to change without notice.

4D Technology

An Onto Innovation Business



2021.03.23 ■ ©4D Technology Corporation

3280 E Hemisphere Loop, Ste 146, Tucson, AZ 85706 • Tel: +1 (520) 294-5600 • Fax: +1 (520) 294-5601 • www.4DTechnology.com